

Clear Tile LP25

Application

The clear tile LP25 from J.A. Plast is used to improve the amount of daylight entering unheated roof space and attics.

Please refer to national standards.

- For pitched roofs
- Can be manufactured for any profile
- CE marked

Design

The LP25 clear tile is shaped to fit the specific roofing profile. It is fixed to the batten with a clear strap, making installation quick and easy and integration with the roofing profile complete. The LP25 can be supplied as single tile or in modules from 2 to 8 tiles wide.

Max. width 1350 mm.

Colour and Surface

The clear tile is transparent.

Materials

Clear tiles of 1 or 2 modules are manufactured from acrylic.

Clear tiles of 3 to 8 modules are manufactured from polycarbonate with a protective filter of acrylic.




Both types have supreme durability and UV resistance and are impact-proof towards hailstorm and rough weather - well protected from cracking.

Handling

Keep in original packaging during transport.

Do not wrap and expose to heavy load during transport.

Do not store in sunlight. Remove protective foil before exposing to sunlight.

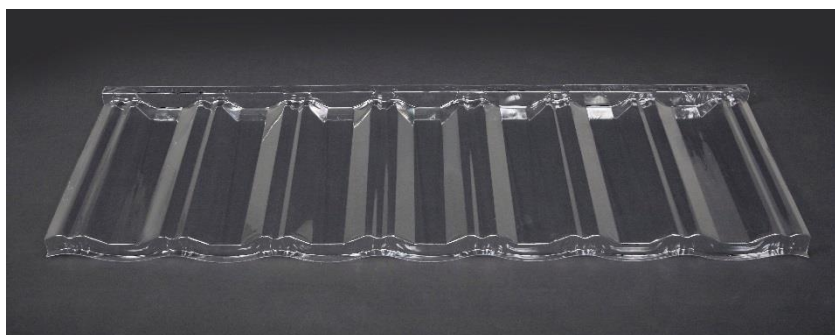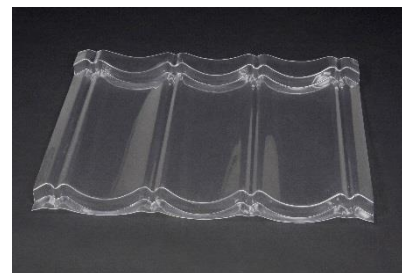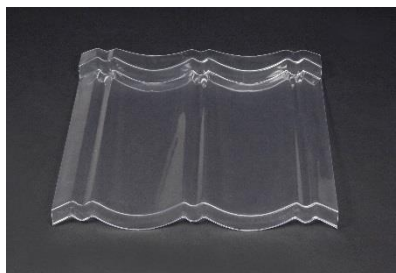

Roofing accessories supplied from J.A. Plast match roof profile, colour and surface 100%. The current product list and further information can be found on our homepage, www.japlast.com.