

# Underlay Ventilation UV2000

## Application

The UV2000 from J.A. Plast is for safe penetration of the roof underlay when ventilating the batten cavity or leading pipes through the undelay. It is suitable for all standard flexible membranes.

*Please refer to national standards.*

- Ø 98 mm = 7,500 mm<sup>2</sup> ventilation area
- Quick and easy installation
- Insect inhibitor
- For flexible membranes

## Design

Specially designed for installation in flexible membranes, the seal ring of the UV2000 forces the surrounding membrane upwards, diverting water safely away from the opening.

The included mesh cover protects against snow and insects. The UV2000 is quick and easy to install with a Stanley knife as only tool required. UV2000 is supplied in bags of 10, with fixing instructions and template for cutting membrane.

## Colour

Transparent white.

## Materials

Polyethylene.


## Handling

Keep in original packaging during transport.

Do not wrap and expose to heavy load during transport.

Remove plastic bag before placing in sunlight.

For more detailed installation guide see separate data sheet No. 5.11-02.2019.

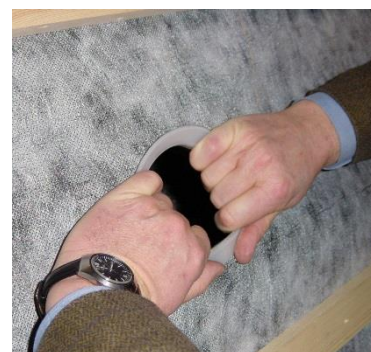

*Seal ring installed.*



*The mesh cover in place.*

*Roofing accessories supplied from J.A. Plast match roof profile, colour and surface 100%. The current product list and further information can be found on our homepage, [www.japlast.com](http://www.japlast.com).*